

HF21FF

SUBMINIATURE HIGH POWER RELAY



File No.:E133481



Features

- 15A switching capability
- 1 Form A, 1 Form B and 1 Form C configurations
- Standard PCB layout
- Plastic sealed and flux proofed types available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (20.2 x 16.5 x 20.2) mm

CONTACT DATA

Contact arrangement	1A, 1B	1C
Contact resistance	100mΩ (at 1A 6VDC)	
Contact material	AgSnO ₂ , AgCdO	
Contact rating	15A 120VAC	10A 120VAC/24VDC
Max. switching voltage	250VAC / 30VDC	
Max. switching current	15A	10A
Max. switching power	1800VA / 240W	
Mechanical endurance	1 x 10 ⁷ OPS	
Electrical endurance	1 x 10 ⁵ OPS	

CHARACTERISTICS

Insulation resistance	100MΩ (at 500VDC)	
Dielectric strength	Between coil & contacts	1500VAC 1min
	Between open contacts	750VAC 1min
Operate time (at nomi. volt.)	10ms max.	
Release time (at nomi. volt.)	5ms max.	
Shock resistance	Functional	98m/s ²
	Destructive	980m/s ²
Vibration resistance	10Hz to 55Hz 1.5mm DA	
Humidity	35% to 85% RH	
Ambient temperature	-40°C to 70°C	
Termination	PCB	
Unit weight	Approx. 13g	
Construction	Plastic sealed, Flux proofed	

Notes: 1) The data shown above are initial values.

2) Please find coil temperature curve in the characteristic curves below.

COIL

Coil power	5VDC to 24VDC: 360mW; 48VDC: 530mW
------------	------------------------------------

COIL DATA

at 23°C

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
5	3.80	0.5	6.5	70 x (1±10%)
6	4.50	0.6	7.8	100 x (1±10%)
9	6.80	0.9	11.7	225 x (1±10%)
12	9.00	1.2	15.6	400 x (1±10%)
18	13.5	1.8	23.4	900 x (1±10%)
24	18.0	2.4	31.2	1600 x (1±15%)
48	36.0	4.8	62.4	4500 x (1±15%)

SAFETY APPROVAL RATINGS

UL/CUL	1 Form C	10A 120VAC
	1 Form A	15A 120VAC TV-5 120VAC
	1 Form B	15A 120VAC 1800VA at 25°C, Ballast 6.5A 277VAC 1800VA at 25°C, Ballast
	1 Form B F type	8.3A 120VAC 1000VA at 90°C, Ballast 3.6A 277VAC 1000VA at 90°C, Ballast

Notes: Only some typical ratings are listed above. If more details are required, please contact us.



HONGFA RELAY

ISO9001, ISO/TS16949, ISO14001, OHSAS18001, IECQ QC 080000 CERTIFIED

2010 Rev. 1.00


ORDERING INFORMATION

Type	HF21FF / 012 -1H S T F (XXX)					
Coil voltage	5, 6, 9, 12, 18, 24, 48VDC					
Contact arrangement	1H: 1 Form A 1D: 1 Form B 1Z: 1 Form C					
Construction ¹⁾	S: Plastic sealed Nil: Flux proofed					
Contact material	T: AgSnO ₂ Nil: AgCdO					
Insulation standard	F: Class F Nil: Class B					
Customer special code						

Notes: 1) Under the ambience with dangerous gas like H₂S, SO₂ or NO₂, plastic sealed type is recommended; Please test the relay in real applications. If the ambience allows, flux proofed type is preferentially recommended. If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

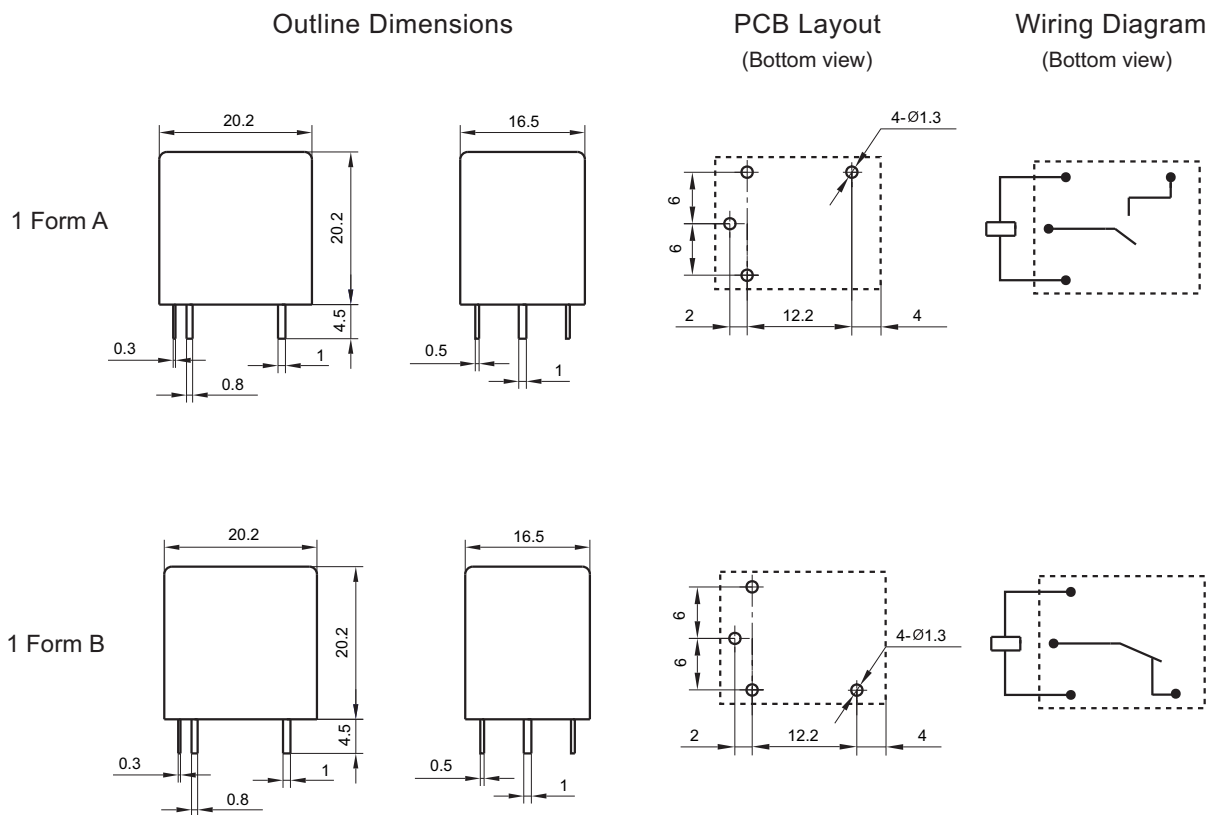


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

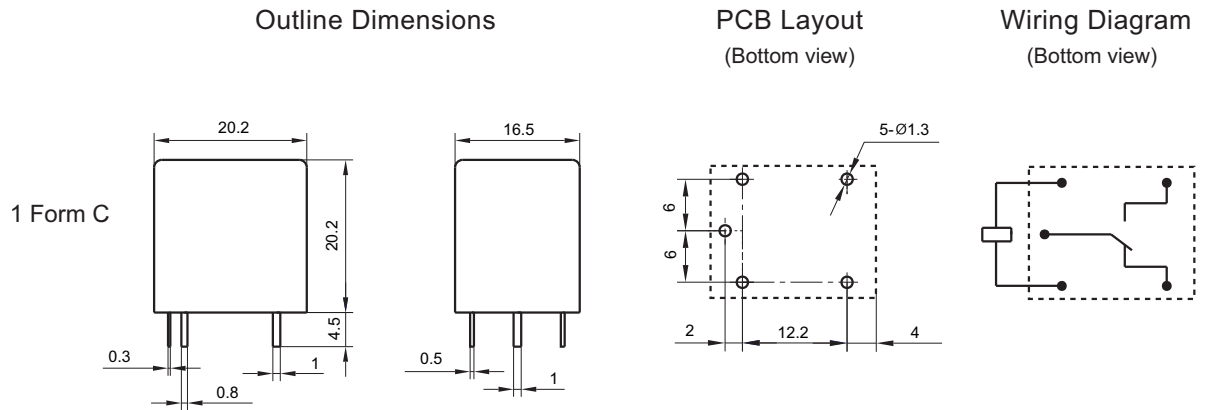

Remark: 1) In case of no tolerance shown in outline dimension: outline dimension ≤ 1 mm, tolerance should be ± 0.2 mm; outline dimension > 1 mm and ≤ 5 mm, tolerance should be ± 0.3 mm; outline dimension > 5 mm, tolerance should be ± 0.4 mm.
 2) The tolerance without indicating for PCB layout is always ± 0.1 mm.

CHARACTERISTIC CURVES

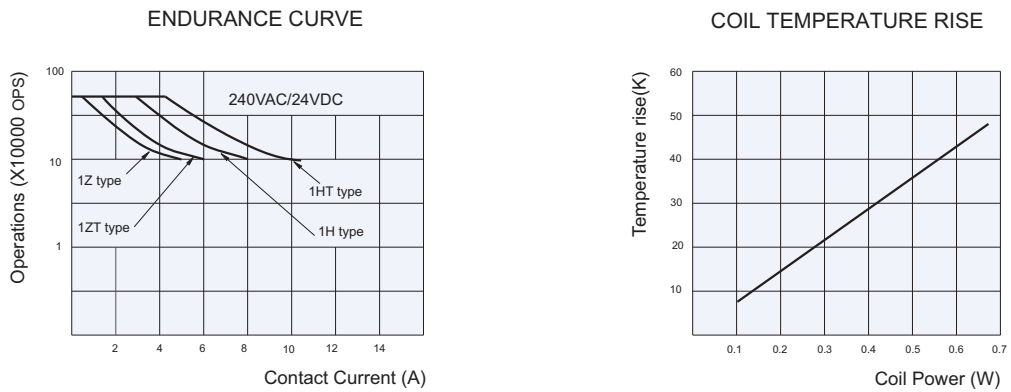

Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.

© Xiamen Hongfa Electroacoustic Co., Ltd. All rights of Hongfa are reserved.